
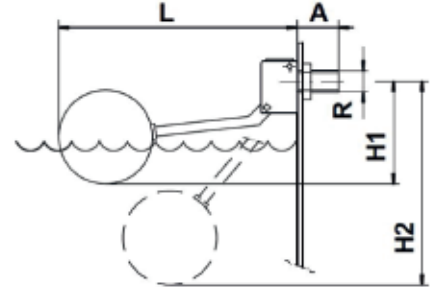


Bolla para válvula de flote

DIMENSIONES

PN	A	R	PESO Kg
10	90 mm	M6	0.12
10	110 mm	M6	0.15
10	160 mm	M8	0.45
10	200 mm	M12	0.85
10	300 mm	M12	2.78
10	400 mm	M12	4.51

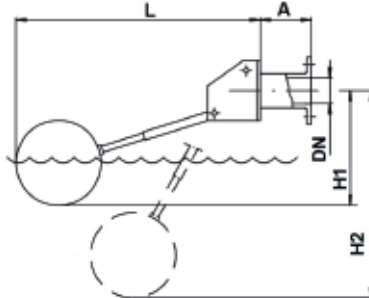

DIMENSIONES

R	DN	PN	A	L	H1	H2	BOYA	PESO Kg
3/8"	10	10	32 mm	300 mm	83 mm	235 mm	90 mm	0.35
1/2"	15	10	35 mm	410 mm	127 mm	375 mm	110 mm	0.45
3/4"	20	10	42 mm	500 mm	155 mm	436 mm	160 mm	1.00
1"	25	10	45 mm	580 mm	174 mm	521 mm	160 mm	1.05
1 1/4"	32	10	52 mm	580 mm	164 mm	520 mm	160 mm	1.25
1 1/2"	40	10	60 mm	620 mm	253 mm	651 mm	200 mm	3.45
2"	50	10	70 mm	720 mm	255 mm	736 mm	200 mm	3.75
2 1/2"	65	10	80 mm	720 mm	277 mm	737 mm	200 mm	4.40
3"	80	10	170 mm	1447 mm	310 mm	1248 mm	300 mm	22.58
4"	100	10	170 mm	1550 mm	265 mm	1337 mm	400 mm	25.13

H1= Válvula en posición cerrada • H2= Válvula en posición abierta

CAUDAL Litros x hora (l / h)

PRESION (BAR)						
1	2	3	4	6	8	10
1.132	1.669	1.904	2.169	2.656	2.825	3.082
2.829	3.998	4.895	5.657	6.790	7.978	8.938
4.838	6.842	8.370	9.677	11.805	13.993	15.289
6.934	9.919	12.147	14.068	17.167	19.654	21.945
7.440	10.643	13.034	15.095	18.420	21.089	23.547
15.556	21.948	26.928	31.104	37.635	43.657	51.516
23.685	33.863	40.977	47.372	57.791	67.532	75.500
24.869	35.556	43.025	49.740	60.680	70.908	79.275

PBX: (502) 2386 - 8787

inoxidable@mainco.com.gt

www.mainco.com.gt

42 calle 22-17 Colonia Industrial Santa Elisa zona 12, Bodega 5.