

Codo clamp corto

Opciones


1. Material SS304
2. material SS316L

Características

1. Facil montaje
2. Facil desmontaje
3. Pulido sanitario interno y externo

Medidas disponibles

1/2"
3/4"
1"
1 1/2"
2"
2 1/2"
3"
4"

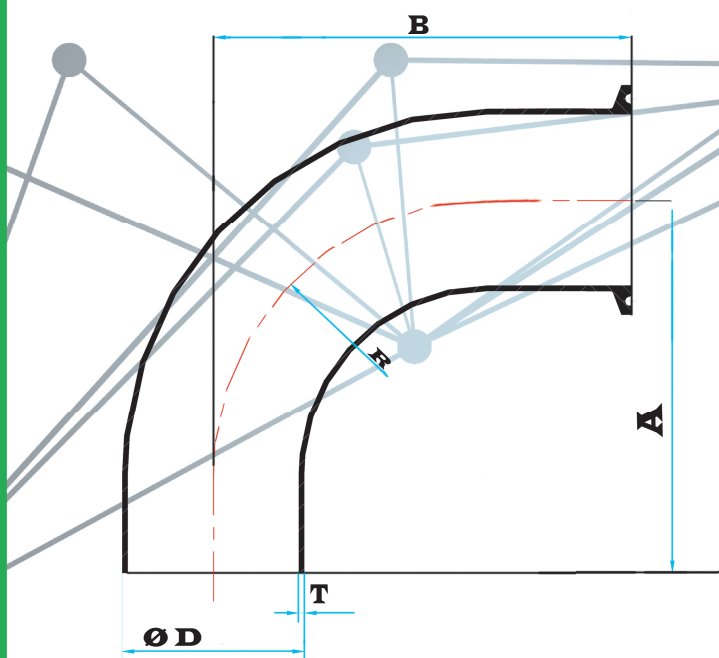

Ø	A-TOLERANCIA	B-TOLERANCIA	D-TOLERANCIA	R	T-TOLERANCIA
1/2	32.8 $\pm$ 0.76		12.5 $\pm$ 0.38	30	1.65 $\pm$ 0.3 ^{+0.2}
3/4	42 $\pm$ 0.76		19 $\pm$ 0.38	37.8	1.65 $\pm$ 0.3 ^{+0.2}
1	52.4 $\pm$ 0.76	65.1 $\pm$ 0.76	25.4 $\pm$ 0.38	38.1	1.65 $\pm$ 0.3 ^{+0.2}
1-1/2	74.6 $\pm$ 0.76	87.3 $\pm$ 0.76	38.1 $\pm$ 0.38	57.2	1.65 $\pm$ 0.3 ^{+0.2}
2	103.2 $\pm$ 0.76	115.9 $\pm$ 0.76	50.8 $\pm$ 0.38	76.2	1.65 $\pm$ 0.3 ^{+0.2}
2-1/2	131.7 $\pm$ 1.14	144.4 $\pm$ 1.14	63.5 $\pm$ 0.38	95.3	1.65 $\pm$ 0.3 ^{+0.2}
3	160.3 $\pm$ 1.14	173.0 $\pm$ 1.14	76.2 $\pm$ 0.51	114.3	1.65 $\pm$ 0.3 ^{+0.2}
4	211.1 $\pm$ 1.14	227 $\pm$ 1.14	101.6 $\pm$ 0.79	152.4	2.11 $\pm$ 0.35 ^{+0.25}

PBX: (502) 2386 - 8787

inoxidable@mainco.com.gt



www.mainco.com.gt

42 calle 22-17 Colonia Industrial
Santa Elisa zona 12, Bodega 5.