


Tee reducida conexión soldar

Características

Accesorio en forma de T que permite realizar una conexión a tres bandas o hacer desvios de productos a diferentes zonas

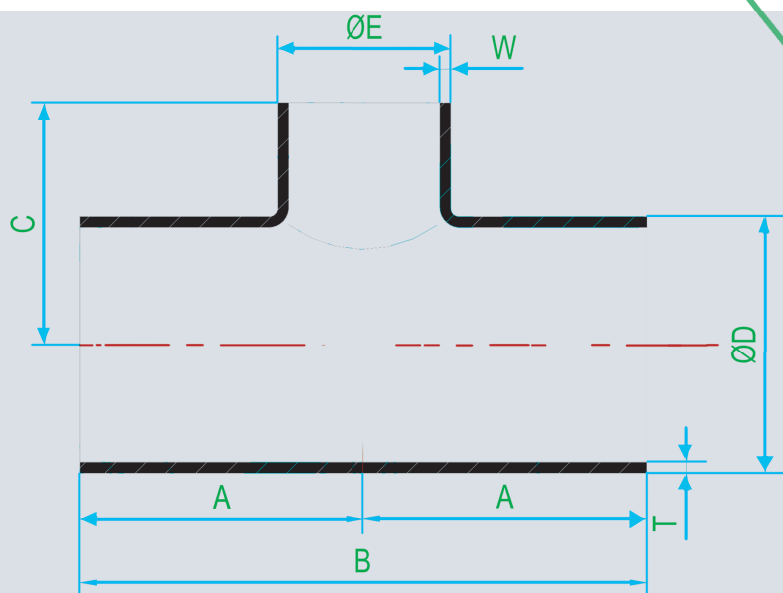

Opciones

1. Acero inoxidable 304
2. Acero inoxidable 316L

Medidas disponibles

1. 1 1/2" x 1"
2. 2" x 1 1/2"
3. 2 1/2" x 1"
4. 2 1/2" x 1 1/2"
5. 2 1/2" x 2"
6. 3" x 1 1/2"
7. 3" x 2"
8. 3" x 2 1/2"
9. 4" x 1 1/2"
10. 4" x 2"
11. 4" x 2 1/2"
12. 4" x 3"

	A	B	C	T	W	ΦE	ΦD
1-1/2x1	57.2±0.76	14.4±1.14	54	+0.2 1.65-0.3	+0.2 1.65-0.3	25.4±0.38	38.1±0.38
2x1-1/2	76.2±0.76	52.4±1.14	63.5	+0.2 1.65-0.3	+0.2 1.65-0.3	38.1±0.38	50.8±0.38
2-1/2x1	76.2±1.14	52.4±1.52	66.7	+0.2 1.65-0.3	+0.2 1.65-0.3	25.4±0.38	63.5±0.38
2-1/2x1-1/2	76.2±1.14	52.4±1.52	69.9	+0.2 1.65-0.3	+0.2 1.65-0.3	38.1±0.38	63.5±0.38
2-1/2x2	76.2±1.14	52.4±1.52	82.6	+0.2 1.65-0.3	+0.2 1.65-0.3	50.8±0.38	63.5±0.38
3x1-1/2	82.6±1.14	65.2±1.52	76.2	+0.2 1.65-0.3	+0.2 1.65-0.3	38.1±0.38	76.2±0.51
3x2	82.6±1.14	65.2±1.52	88.9	+0.2 1.65-0.3	+0.2 1.65-0.3	50.8±0.38	76.2±0.51
3x2-1/2	82.6±1.14	65.2±1.52	82.6	+0.2 1.65-0.3	+0.2 1.65-0.3	63.5±0.38	76.2±0.51
4x1-1/2	98.4±1.14	96.8±1.52	88.9	+0.25 2.11-0.35	+0.2 1.65-0.3	38.1 ±0.38	101.6±0.79
4x2	98.4±1.14	96.8±1.52	101.6	+0.25 2.11-0.35	+0.2 1.65-0.3	50.8±0.38	101.6±0.79
4x2-1/2	98.4±1.14	96.8±1.52	95.3	+0.25 2.11-0.35	+0.2 1.65-0.3	63.5±0.38	101.6±0.79
4x3	98.4±1.14	96.8±1.52	95.3	+0.25 2.11-0.35	+0.2 1.65-0.3	76.2±0.51	101.6±0.79

PBX: (502) 2386 - 8787

inoxidable@mainco.com.gt

www.mainco.com.gt

**42 calle 22-17 Colonia Industrial
Santa Elisa zona 12, Bodega 5.**