

Mesh acero inoxidable


Agujero por pulgada lineal	Diámetro de alambre		Diámetro de abertura		Diámetro de abertura micrones
	pulgadas	mm	pulgadas	mm	
1x1	0.08	2.03	0.92	23.37	23,370
2x2	0.063	1.6	0.437	11.1	11,100
3x3	0.054	1.37	0.279	7.09	7,090
4x4	0.063	1.6	0.187	4.75	4,750
5x5	0.041	1.04	0.159	4.04	4,040
6x6	0.035	0.89	0.132	3.35	350
8x8	0.028	0.71	0.097	2.46	2,460
10x10	0.025	0.64	0.075	1.91	1,910
12x12	0.02	0.508	0.063	1.6	1,600
14x14	0.023	0.584	0.048	1.22	1,220
16x16	0.018	0.457	0.0445	1.13	1,130
18x18	0.017	0.432	0.0386	0.98	980
20x20	0.016	0.406	0.034	0.86	860
24x24	0.014	0.356	0.0277	0.7	700
30x30	0.012	0.305	0.0213	0.54	540
30x30	0.009	0.229	0.0243	0.62	620
35x35	0.011	0.279	0.0176	0.45	450
40x40	0.01	0.254	0.015	0.38	380
50x50	0.009	0.229	0.011	0.28	280
50x50	0.008	0.203	0.012	0.31	310
60x60	0.007	0.178	0.0097	0.25	250
80x80	0.0065	0.165	0.006	0.15	150
80x80	0.0055	0.14	0.007	0.18	180
100x100	0.004	0.102	0.006	0.15	150
120x120	0.0037	0.094	0.0046	0.1168	117
150x150	0.0026	0.066	0.0041	0.1041	104
200x200	0.0021	0.0533	0.0029	0.0737	74

Mesh Tejido holandés

Tipo Mesh	Diámetro pulgadas		Abertura micrones
30X150	0.009	0.007	100
24X110	0.015	0.01	125

Aplicaciones

1. Filtros de malla inoxidable
2. Discos de malla inoxidable con cañuela
3. Aplicacion en filtros circular tubular
4. Canastas para freir
5. Filtro ondulado Etc.

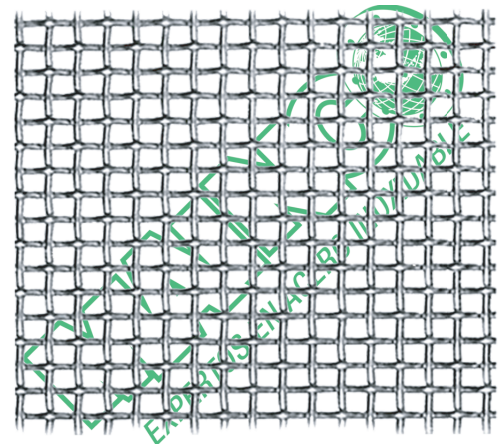

 **PBX: (502) 2386 - 8787**

 **inoxidable@mainco.com.gt**

 **www.mainco.com.gt**

 **42 calle 22-17 Colonia Industrial Santa Elisa zona 12, Bodega 5.**